



Suggested V-Anchor Spacing


Lining Thickness	Spacing
2"	6" o.c.
3"	9" o.c.
4"	12" o.c.
5"	12" o.c.
6"	12" o.c.
7"	9" x 12" o.c.
8"	9" x 12" o.c.
9"	9" o.c.

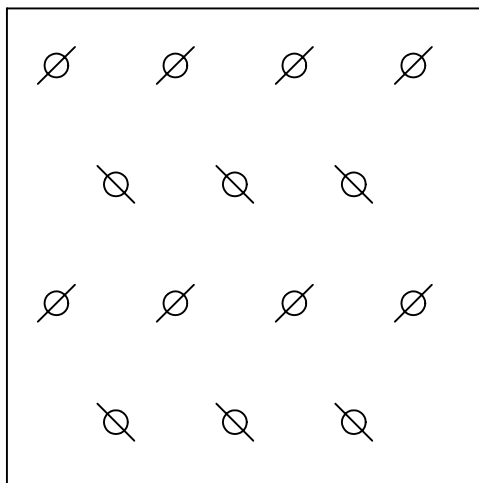

Diamond

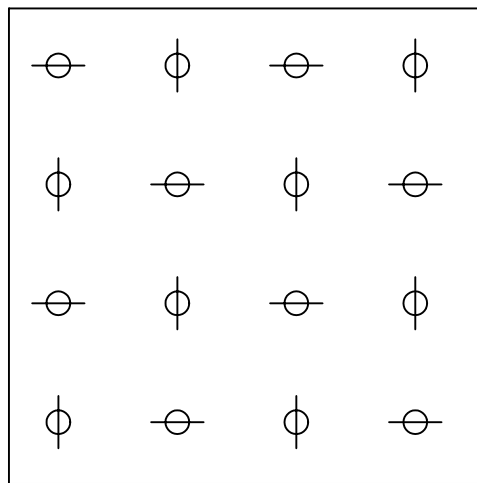

Square

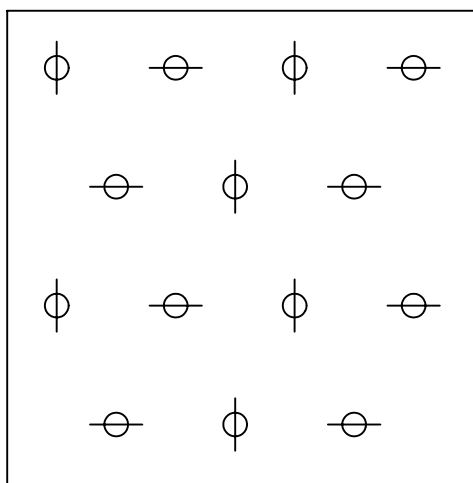

Staggered

Actual spacing may vary from 6" to 18" on center dependent on the refractory used, temperature, service conditions, and installation methods. Consulting the plibrico Engineering Department regarding questionable applications.

Plibrico Company

Refractory Engineering & Construction for
Boilers * Incinerators * Industrial Furnaces.
Chicago, Illinois Nationwide Service

V Anchor Spacing

REDRAWN BY: LC	SCALE: N.T.S.
REDRAWN DATE: 5/03	ORIG. DATE: 9/92
REV.	No. 42

This drawing is the property of PLIBRICO COMPANY and is loaned without consideration other than the borrower's agreement that it shall not be reproduced, copied, loaned or disposed of, directly or indirectly, nor used for any purpose other than that for which it is specifically furnished.